



promate.net Lifestyle Technology

proSwitch.H3

3-in-1 HDMI Switch Plug and Play



User Guide

Introduction

proSwitch.H3 is a compact gadget designed to offer 3 HDMI ports in a single device. With proSwitch.H3 you can enjoy a plug-and-play functionality and full HD resolution support. Having a shielded case and three HDMI input ports, with proSwitch.H3, you can connect up to three HDMI devices (such as DVD Player, Satellite Receiver, Set-Top Box, DV Camera and other HDMI enabled devices) to a single port of an HD display. This clever gadget simply re-clocks the HDMI signal of multiple sources. Switch manually or use the provided remote control to distantly choose between the three lines at your own comfort. Minimize the bulk around the TV, conveniently connect all your devices to proSwitch.H3 and assure yourself a hassle-free signal without interference.

Specification

Input Video Signal :	0.5-1.0 V
Input DDC Signal :	5 V (TTL) 1920X1200, 1080p
Input HDMI cable max :	10m
Output HDMI cable max :	10m
Support:	480i/p, 576i/p, 1080i/p
Dimension:	100x48x24.5 (mm)
AC Adapter:	Input 100-240V
DC:	Output 5V/1A

Features

- 3-in-1 HDMI switches routes HD Video and Audio (up to 1080p), Supports high resolutions up to 1920* 1200
- Support HDCP protocol and applicable to source device and high definition display device such as DVD and HDTV which have HDMI ports or digital ports, and are compliant with HDCP protocol.
- Plug and Play, no installation required.
- Remote control for switching the source display conveniently.
- Multi group signals to display on one HD display
- Protective casing box


- LED indicators for each source channel.
- Auto- switching with remote control
- Auto sensing inputs
- Extends the range of the HDMI compliant device by equalizing and rellocking the HDMI

Packing Contents


- proSwitch.H3
- Power Adapter-UK
- Remote Control
- User Guide

Appearance & Interface Description


Front View

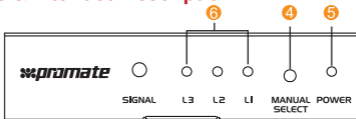

Side View



Back View

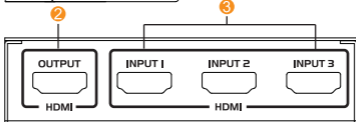


proSwitch.H3

1. Charging Port
2. HDMI output
3. HDMI input ports
4. Manual select button
5. Power LED Indicator
6. HMDI source indicators

Operation Instructions


Connecting to proSwitch.H3

1. Connect a HD display to HDMI output port, as shown on the picture below:

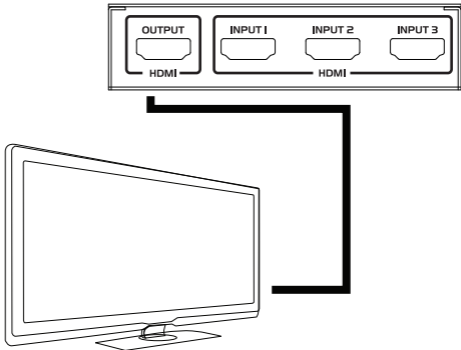


Remote Control


1. Battery
2. HDMI channels




2. Once proSwitch.H3 is connected to the HD display, you can start connecting it to a source devices to the input ports, examples are shown on the picture below:

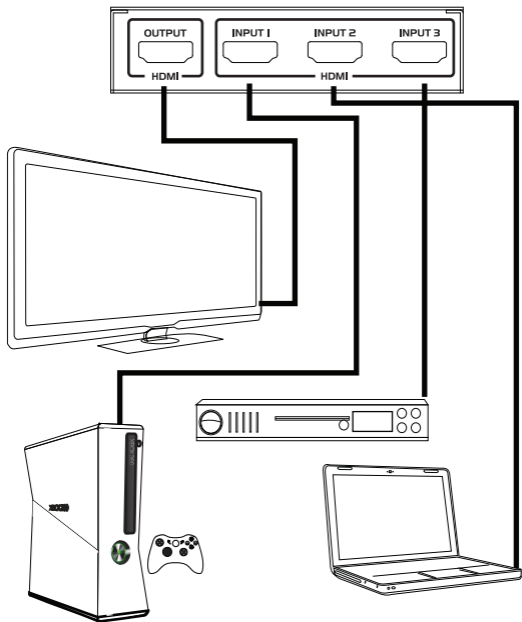

3. Once you have connected all the required source devices and to the HD display, you can connect the power adapter to the proSwitch.H3 and to the electricity

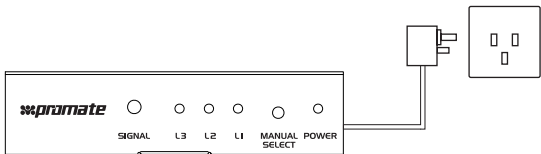

4. Before you start using the proSwitch.H3, it is recommended that you turn on the proSwitch.H3 first and then power in the sources supply.

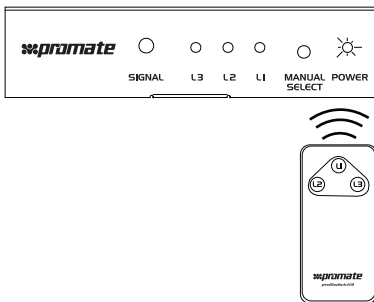

Note: Please make sure, before you turn the proSwitch.H3 "ON", that all the source devices and the HD display devices ports are connected properly.

Product Safety and usage Warnings

- Always charge with provided original power adapter.
- Please do not attempt to disassemble this product, it is possible to result in short-circuit or even damage.
- The product should be kept in dry and ventilated environment, please avoid high humidity and high temperature.
- Do not install the equipment near heat sources such as fire, power, or other simplifiers that product heat.
- Please do not use organic solvent to clean product surface.
- Please keep the product away from little children.
- Please do not drop, knock or shake the proSwitch.H3.
- Rough handling can break internal circuit boards and mechanics.
- Keep the surface clean.



www.promate.net